

LANGOFLEX PA-D




LANGOFLEX PA-D



Mechanical & Abrasion Protection



Expandable Sleeving



Braided



PA .010" (0.25 mm) monofilament



Standard: Black, orange
Option: Other colors upon request



Low: -40°C (-40°F)
High: 125°C (257°F)



Options: LANGOFLEX PA: standard construction
LANGOFLEX PA-HD: high density construction




High abrasion resistance
Standard, dense or high density construction

PHYSICAL PROPERTIES

Physical properties	Spec	Value
Long term aging (3000h/125°C)	-	pass
Short term aging (240h/150°C)	-	pass
Abrasion resistance	GMW 14327 MBN LV 312-3, VW 60360-3, GS 95008-3-3	category 5 class G
Flammability	FMVSS 302	0 mm/min
Chemical resistance	Resists the majority of chemicals and automotive fluids	

DIMENSIONS

Designation	Nominal A Ø (mm)	Maximum B Ø (mm)	Coverage
LANGOFLEX PA-D 03	3	6	> 85%
LANGOFLEX PA-D 04	4	9	
LANGOFLEX PA-D 06	6	11	
LANGOFLEX PA-D 08	8	13	
LANGOFLEX PA-D 10	10	17	
LANGOFLEX PA-D 14	14	22	
LANGOFLEX PA-D 16	16	23	
LANGOFLEX PA-D 18	18	24	
LANGOFLEX PA-D 20	20	27	
LANGOFLEX PA-D 22	22	32	
LANGOFLEX PA-D 24	24	37	
LANGOFLEX PA-D 27	27	45	
LANGOFLEX PA-D 35	35	50	
LANGOFLEX PA-D 40	40	70	
LANGOFLEX PA-D 50	50	80	

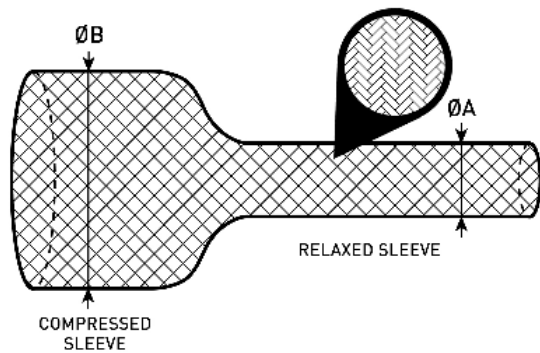

PACKAGING

Coils
Cut lengths upon request