


GP80-PO

General Purpose Polyolefin

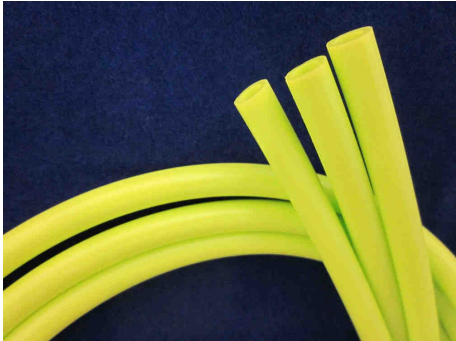

Product Description

Grayline GP80-PO is a cross-linked polyolefin tubing suitable for general purpose fluid transfer applications where high temperature resistance and excellent flexibility is required. It has a wide operating temperature range and is halogen-free.

*Standard Packaging: Reels or Cut to Customer Specifications.
Standard Color: Black, Clear
Custom Colors & Sizes Available Upon Request*

Specifications

- EU Directive 2000/53/EC (ELV)
- EU Directive 2011/65/EC (RoHS2)
- FMVSS302

Features

- Operating Temperature is -55° to 125°C
- Fluid Resistant
- Lead Free
- Halogen Free

PROPERTY	TYPICAL VALUE	TEST METHOD
Durometer Hardness, Shore A (15sec.)	80	ASTM D2240
Tensile Strength (psi)	2,500	ASTM D412
Elongation (%)	400	ASTM D412
Specific Gravity	0.90	ASTM D792
Heat shock, 4 hours @ 225°C	PASS	SAE-AMS-DTL-23053

The values listed in this bulletin, to the best of our knowledge, are accurate. They are typical performance results and are not intended to be used as design data. We disclaim all liability in connection with the use of information contained herein or otherwise.