



NU-GUARD EMI HV



NU-GUARD EMI HV

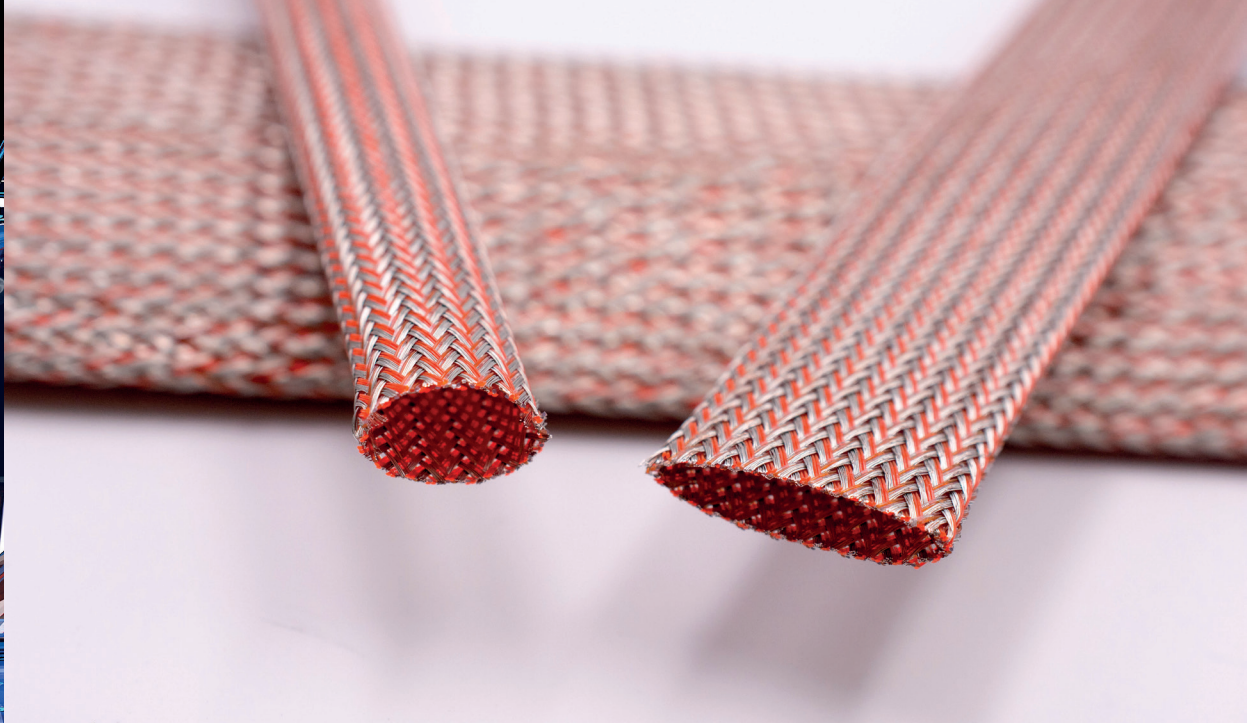

Electromagnetic Shielding



Expandable Sleeving



Braided



saturated PET monofilament
Tinned copper



Standard: Orange



Low: -40°C (-40°F)
High: 150°C (302°F)



Electromagnetic shielding