


LANGOFLEX PA




LANGOFLEX PA



Mechanical & Abrasion Protection



Expandable Sleeving



Braided



PA .010" (0.25 mm) monofilament



Standard: Black, orange
Option: Other colors upon request



Low: -40°C (-40°F)
High: 125°C (257°F)



Options: LANGOFLEX PA-D: dense construction
LANGOFLEX PA-HD: high density construction




High abrasion resistance
Standard, dense or high density construction

PHYSICAL PROPERTIES

Physical properties	Spec	Value
Long term aging (3000h/125°C)	-	pass
Short term aging (240h/150°C)	-	pass
Abrasion resistance	GMW 14327 PSA 96 458 709 99	category 4 class 4
Flammability	SAE J 369	self-extinguishing
Chemical resistance	Resists the majority of chemicals and automotive fluids	

DIMENSIONS

Designation	Nominal A Ø (mm)	Maximum B Ø (mm)
LANGOFLEX PA 04	4	6
LANGOFLEX PA 06	6	9
LANGOFLEX PA 07	7	11
LANGOFLEX PA 10	10	16
LANGOFLEX PA 12	12	18
LANGOFLEX PA 14	14	21
LANGOFLEX PA 16	16	25
LANGOFLEX PA 18	18	35
LANGOFLEX PA 25	25	38
LANGOFLEX PA 30	30	45
LANGOFLEX PA 40	40	55
LANGOFLEX PA 50	50	70
LANGOFLEX PA 60	60	80

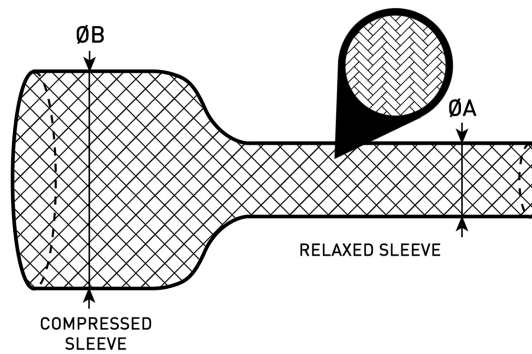

PACKAGING

Coils
Cut lengths upon request