


LANGOFLEX PPS




LANGOFLEX PPS



Mechanical & Abrasion Protection



Expandable Sleeving



Braided



PPS .010" (0.25 mm) monofilament



Standard: Black
Option: Tracer



Low: -40°C (-40°F)
High: 200°C (392°F)




High temperature endurance

PHYSICAL PROPERTIES

Physical properties	Spec	Value
Long term aging (3000h/200°C)	-	pass
Short term aging (240h/225°C)	-	pass
Abrasion resistance	GMW 14327	category 3
	MBN LV 312-3, VW 60360-3, GS 95008-3-3	class D
Flammability	FMVSS 302	0 mm/min
Chemical resistance	Resists the majority of chemicals and automotive fluids	

DIMENSIONS

Designation	Nominal Ø (mm)	Maximum Ø (mm)
LANGOFLEX PPS 03	3	6
LANGOFLEX PPS 04	4	8
LANGOFLEX PPS 05	5	9
LANGOFLEX PPS 06	6	11
LANGOFLEX PPS 08	8	13
LANGOFLEX PPS 10	10	17
LANGOFLEX PPS 12	12	17
LANGOFLEX PPS 14	14	22
LANGOFLEX PPS 16	16	25
LANGOFLEX PPS 18	18	24
LANGOFLEX PPS 20	20	27
LANGOFLEX PPS 22	22	32
LANGOFLEX PPS 25	25	34
LANGOFLEX PPS 30	30	37
LANGOFLEX PPS 35	35	50
LANGOFLEX PPS 40	40	42
LANGOFLEX PPS 50	50	80
LANGOFLEX PPS 70	70	80

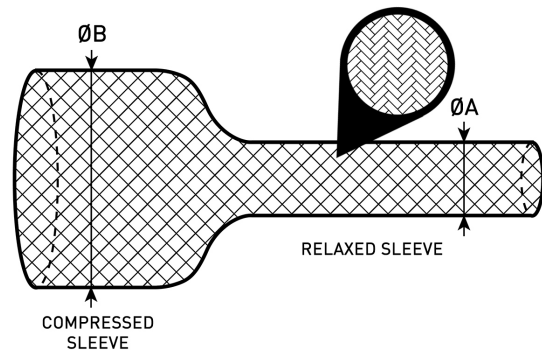

PACKAGING

Coils
Cut lengths upon request