


LANGOFLEX SOUND PET




LANGOFLEX SOUND PET



Mechanical & Abrasion Protection
Noise Reduction



Expandable Sleeving



Braided



PET monofilament and multifilament



Standard: Black, orange
Option: Other colors upon request



Low: -40°C (-40°F)
High: 150°C (302°F)




Noise reduction

PHYSICAL PROPERTIES

Physical properties	Spec	Value
Long term aging (3000h/150°C)	-	pass
Short term aging (240h/175°C)	-	pass
Noise test	MBN LV 312-3, VW 60360-3, GS 95008-3-3	class D
Abrasion resistance	GMW 14327 MBN LV 312-3, VW 60360-3, GS 95008-3-3	category 4 class E
Flammability	FMVSS 302	0 mm/min
Chemical resistance	Resists the majority of chemicals and automotive fluids	

DIMENSIONS

Designation	Nominal A Ø (mm)	Maximum B Ø (mm)
LANGOFLEX SOUND PET 04	4	6
LANGOFLEX SOUND PET 06	6	8
LANGOFLEX SOUND PET 08	8	12
LANGOFLEX SOUND PET 10	10	12
LANGOFLEX SOUND PET 12	12	18
LANGOFLEX SOUND PET 14	14	20
LANGOFLEX SOUND PET 16	16	22
LANGOFLEX SOUND PET 18	18	22
LANGOFLEX SOUND PET 20	20	30
LANGOFLEX SOUND PET 24	24	28
LANGOFLEX SOUND PET 27	27	38
LANGOFLEX SOUND PET 30	30	34

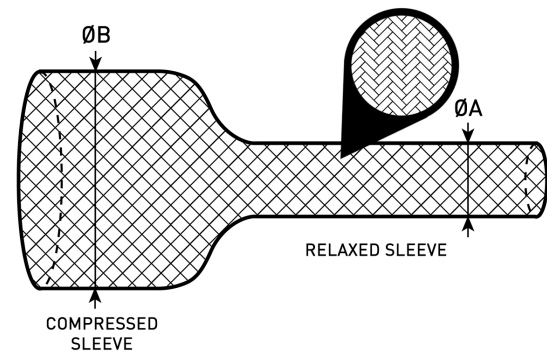

PACKAGING

Coils
Cardboard spools
Cable drums (returnable)
Hot-cutted with sealed edges