


# LANGOFLEX SOUND




## LANGOFLEX SOUND



Mechanical & Abrasion Protection  
Noise Reduction



Expandable Sleeving



Braided



PET monofilament and multifilament



Standard: Black with red tracer



Low: -40°C (-40°F)  
High: 150°C (302°F)




Noise reduction >10 dB

## PHYSICAL PROPERTIES

Physical properties	Spec	Value
Long term aging (3000h/150°C)	-	pass
Short term aging (240h/175°C)	-	pass
Noise test	MBN LV 312-3, VW 60360-3, GS 95008-3-3	class C
Abrasion resistance	GMW 14327	category 1
Flammability	FMVSS 302 SAE J 369	self-extinguishing
Chemical resistance	Resists the majority of chemicals and automotive fluids	

## DIMENSIONS

Designation	Nominal A Ø (mm)	Maximum B Ø (mm)
LANGOFLEX SOUND 03	3	6
LANGOFLEX SOUND 06	6	14
LANGOFLEX SOUND 14	14	18
LANGOFLEX SOUND 18	18	25
LANGOFLEX SOUND 22	22	48
LANGOFLEX SOUND 30	30	75

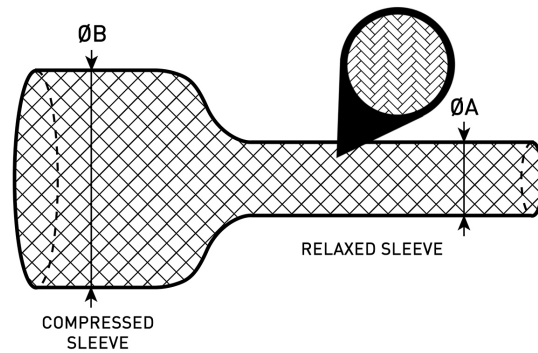

## PACKAGING

Coils  
Cut lengths upon request