



# LANGOFLEX TS



Mechanical & Abrasion Protection



Expandable Sleeving




Braided



PET monofilament .009" (0.22 mm)



Standard: Black  
Option: Other colors upon request



Low: -40°C (-40°F)  
High: 150°C (302°F)




Medium to low abrasion resistance

## PHYSICAL PROPERTIES

Physical properties	Spec	Value
Long term aging (3000h/150°C)	-	pass
Short term aging (240h/175°C)	-	pass
Abrasion resistance	GMW 14327	category 4
Flammability	FMVSS 302 SAE J 369	self-extinguishing
Chemical resistance	Resists the majority of chemicals and automotive fluids	

## DIMENSIONS

Designation	Nominal A Ø (mm)	Maximum B Ø (mm)
LANGOFLEX TS 03	3	5
LANGOFLEX TS 04	4	7
LANGOFLEX TS 05	5	9
LANGOFLEX TS 06	6	11
LANGOFLEX TS 08	8	12
LANGOFLEX TS 10	10	15
LANGOFLEX TS 12	12	17
LANGOFLEX TS 15	15	20
LANGOFLEX TS 20	20	26
LANGOFLEX TS 25	25	34
LANGOFLEX TS 30	30	40
LANGOFLEX TS 40	40	50
LANGOFLEX TS 50	50	66

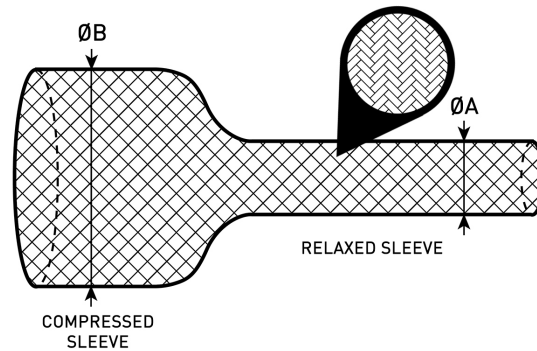

## PACKAGING

Coils  
Cut lengths upon request