

NU-FLAT PA




NU-FLAT PA



Mechanical & Abrasion Protection
Noise Reduction



Tubular, Wrappable & Shrinkable Sleeving



Woven band



Polyamide multifilament



Standard: Black



Low: -40°C (-40°F)
High: 125°C (257°F)



Excellent mechanical performance
Wire bundles in flat position


PHYSICAL PROPERTIES

Physical properties	Spec	Value
Long term aging (3000h/125°C)	-	pass
Abrasion resistance	SAE J 2192 option 1	> 200 000 cycles
Flammability	FMVSS 302	< 100 mm/min
Chemical resistance	Resists the majority of chemicals and automotive fluids	

DIMENSIONS

Widths (W) = 65mm, 175mm

For other dimensions, please contact our Sales Department.

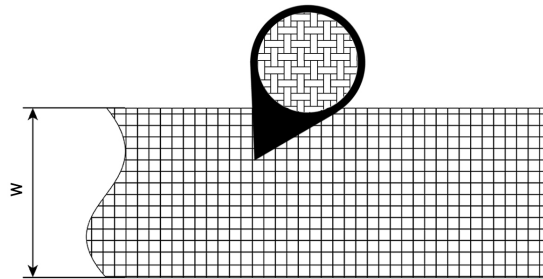

PACKAGING

Spools
Bulk spools
Cut to length (1/2" and under)