




NU-KOOL T-G




NU-KOOL T-G

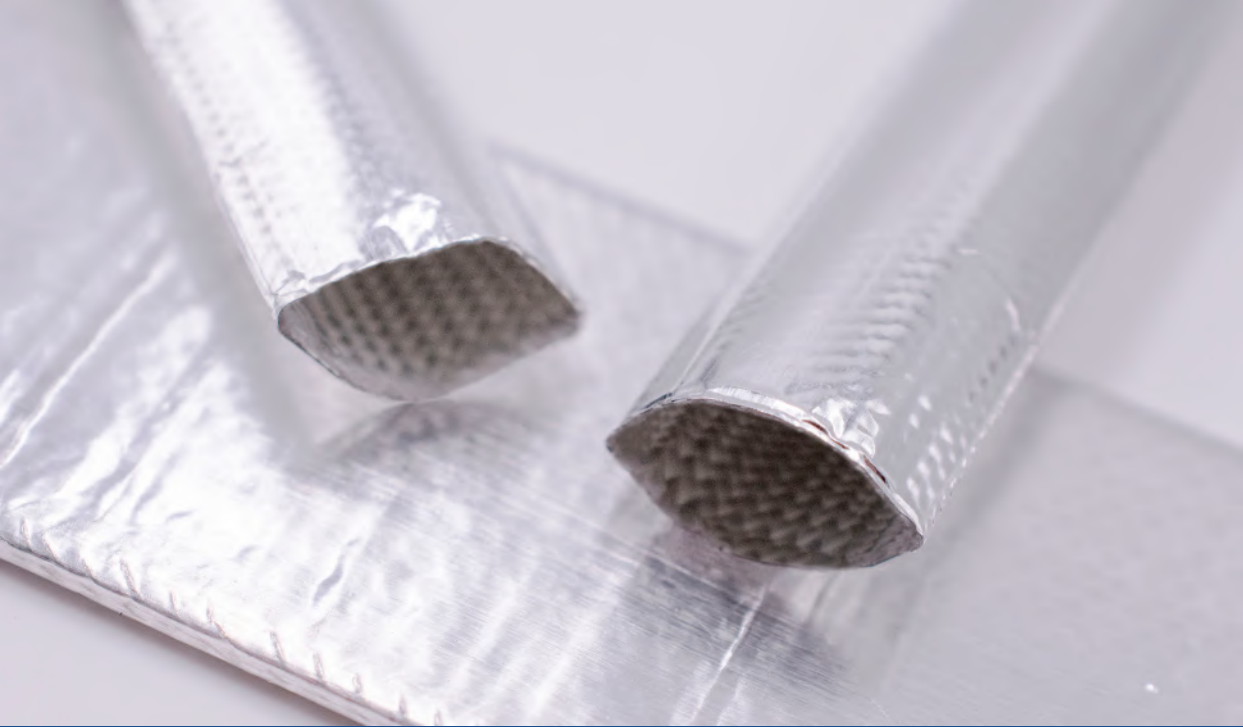

Radiant Heat Protection



Reflective Sleeving & Heat Shield



Tubular braided sleeve + Aluminized foil



Fiberglass
Aluminized foil



Standard: Silver




Low: -40°C (-40°F)
High: 200°C (392°F)



Thermal insulation
Very flexible

PHYSICAL PROPERTIES

Physical properties	Spec	Value
Thermal effectiveness	SAE J2302	see graph
Long term aging (3000h/200°C)	-	pass
Short term aging (240h/225°C)	-	pass
Emissivity	ASTM E408	0.1
Flammability	FMVSS 302 SAE J369	self-extinguishing
Chemical resistance	Resists the majority of chemicals and automotive fluids	

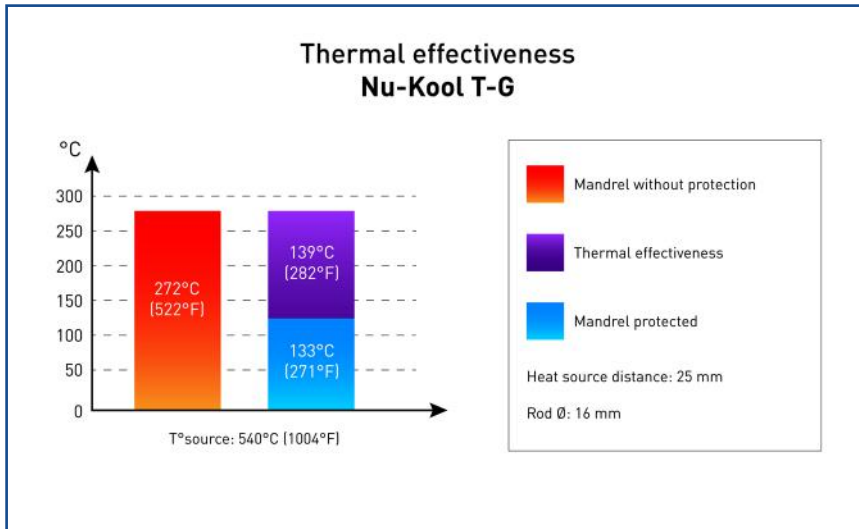

DIMENSIONS

Designation	Nominal A Ø (mm)
NU-KOOL T-G AL 08	8
NU-KOOL T-G AL 10	10
NU-KOOL T-G AL 13	13
NU-KOOL T-G AL 16	16
NU-KOOL T-G AL 19	19
NU-KOOL T-G AL 22	22
NU-KOOL T-G AL 25	25
NU-KOOL T-G AL 29	29
NU-KOOL T-G AL 32	32

PACKAGING

Coils
Cut lengths upon request