

NU-SHIELD FG2A



NU-SHIELD FG2A



Radiant Heat Protection



Reflective Sleeving & Heat Shield



Woven



Fiberglass woven
Aluminized foil
Sensitive adhesive



Standard: Silver




Low: -40°C (-40°F)
High: 175 (347°F)



100% customized shape


PHYSICAL PROPERTIES

Physical properties	Spec	Value
Surface mass	-	361 g/m ²
Long term aging (3000h/175°C)	GMW 15608	pass
Flammability	FMVSS 302	self-extinguishing
Thermal effectiveness	SAE J2302	see graph

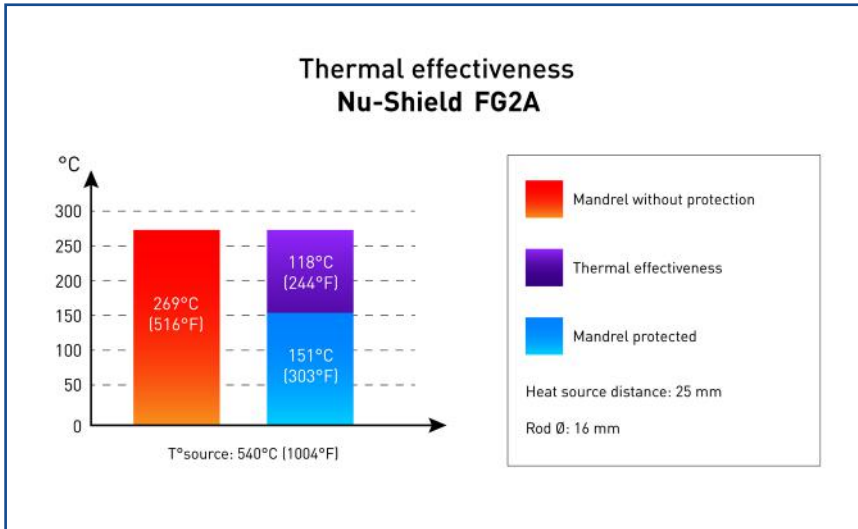

DIMENSIONS

Sizes and diameters depend on the protection need.

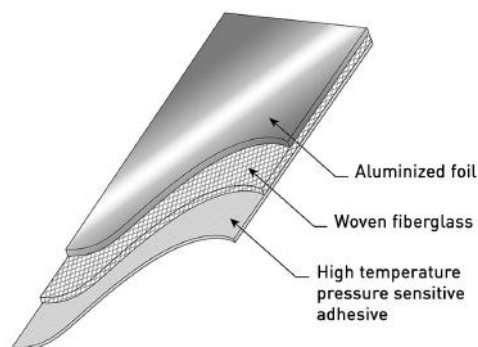

PACKAGING

Complex shapes
Cut lengths (die or kiss cutting)