



NU-SHRINK




NU-SHRINK



Mechanical & Abrasion Protection
Noise Reduction



Tubular, Wrappable & Shrinkable Sleeving



Woven



Modified polyethylene monofilament
Polyester multifilament



Standard: Black



Low: -40°C (-40°F)
High: 125°C (257°F)




Heat-shrinkable protection
Anti-fraying finish

PHYSICAL PROPERTIES

Physical properties	Spec	Value
Long term aging (3000h/125°C)	-	pass
Short term aging (240h/150°C)	-	pass
Abrasion resistance	TL 52668; GS 95008-3-3, VW 60360-3, MBN LV-312	pass class E
Flammability	FMVSS 302 SAE J 369	< 100 mm/min
Chemical resistance	Resists the majority of chemicals and automotive fluids	

DIMENSIONS

Designation	Size before shrinkage (W) (mm)	Recommended application range (ID) (mm)	
		Min.	Max.
NU-SHRINK 06 - 03	6	3	4
NU-SHRINK 12 - 06	12	6	8
NU-SHRINK 20 - 10	20	10	13
NU-SHRINK 25 - 12	25	12	16
NU-SHRINK 30 - 15	30	15	19
NU-SHRINK 34 - 17	34	17	22
NU-SHRINK 40 - 20	40	20	26
NU-SHRINK 50 - 25	50	25	32
NU-SHRINK 60 - 30	60	30	39
NU-SHRINK 70 - 35	70	35	45
NU-SHRINK 80 - 40	80	40	52
NU-SHRINK 90 - 45	90	45 </td <td>58</td>	58
NU-SHRINK 100 - 50	100	50	65
NU-SHRINK 110 - 55	110	55	71

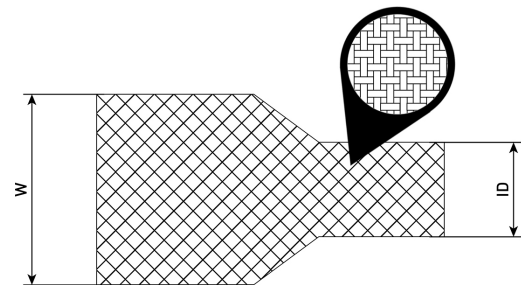

PACKAGING

Coils
Cut lengths upon request