

NU-WRAP PA




NU-WRAP PA



Mechanical & Abrasion Protection
Noise Reduction



Tubular, Wrappable & Shrinkable Sleeving



Woven band



Polyamide multifilament



Standard: Black



Low: -40°C (-40°F)
High: 125°C (257°F)




Excellent mechanical performance
Wire bundles in flat position

PHYSICAL PROPERTIES

| Physical properties | Spec | Value |
|-------------------------------|---|--------------------|
| Long term aging (3000h/125°C) | - | pass |
| Abrasion resistance | GMW 14327 | category 8 |
| Flammability | FMVSS 302 SAE J 369 | self-extinguishing |
| Noise test | GMW 14327 | class D |
| Chemical resistance | Resists the majority of chemicals and automotive fluids | |

DIMENSIONS

| Designation | Nominal Ø (ID) (mm) |
|---------------|---------------------|
| NU-WRAP PA 13 | 13 |
| NU-WRAP PA 16 | 16 |
| NU-WRAP PA 19 | 19 |
| NU-WRAP PA 25 | 25 |
| NU-WRAP PA 32 | 32 |
| NU-WRAP PA 38 | 38 |
| NU-WRAP PA 51 | 51 |

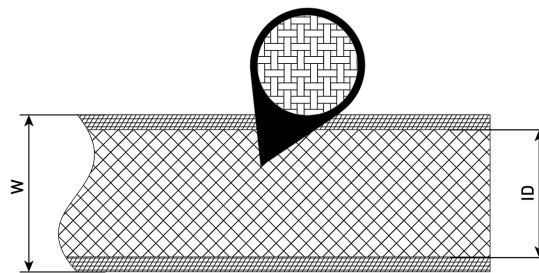

APPROVALS

Direct:
Chrysler, Fiat, Ford, General Motors

Via Tier-1:
-

PACKAGING

Spools
Bulk spools
Cut to length (1/2" and under)