



NU-CRUSH V1




NU-CRUSH V1



Mechanical & Abrasion Protection
Impact & Crash Resistance



Tubular, Wrappable & Shrinkable Sleeving



Woven



High tenacity polyester



Standard: Black, orange
Option: Other colors upon request.



Low: -40°C (-40°F)
High: 150°C (302°F)




High cut-through resistance
Short-circuit protection
Versatile process for more flexibility on colors
Cold cutting

PHYSICAL PROPERTIES

Physical properties	Spec	Value
Long term aging (3000h/150°C)	-	pass
Short term aging (240h/175°C)	-	pass
Abrasion resistance	GS 95008-3-3, VW	class G
	60360-3, MBN LV-312; PSA 96 458 709 99	class 5
Drop test	GS 95008-3-3, VW 60360-3, MBN LV-312	class E
Flammability	FMVSS 302 SAE J 369	self-extinguishing
Chemical resistance	Resists the majority of chemicals and automotive fluids	

DIMENSIONS

Designation	Diameter (mm)
NU-CRUSH V1 07	7
NU-CRUSH V1 08	8
NU-CRUSH V1 10	10
NU-CRUSH V1 13	13
NU-CRUSH V1 16	16
NU-CRUSH V1 19	19
NU-CRUSH V1 22	22
NU-CRUSH V1 25	25
NU-CRUSH V1 28	28
NU-CRUSH V1 30	30

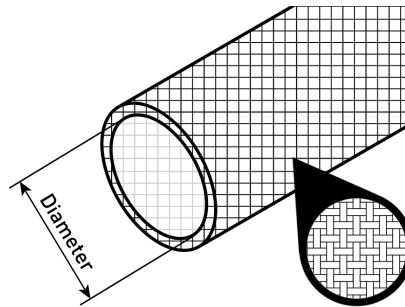

PACKAGING

Coils
Cut lengths upon request